

DATA SHEET: TEMBREAK 2 S250-SF MCCB

Código Larce 3P: 0403001253 0403001254 0403001255
0403001256 0403001257 0403001258

MCCB Electrical Characteristics to IEC 60947-2, EN 60947-2, JIS C 8201-2-1 ANN.1, NEMA AB-1



Frame Reference	Quantity	Unit	Condition	TB2 Lite 250
Max In (A) of Frame				250
Model				S250
Number of Poles				3, 4
Type				SF
Nominal current ratings				
	In	(A)	50°C	125,150,175 200,225, 250
Electrical characteristics				
Rated operational voltage	U _e	(V)	AC 50/60 Hz DC	690 250
Rated insulation voltage	U _i	(V)		690
Rated impulse voltage	U _{imp}	(kV)		8
Ultimate breaking capacity (IEC, JIS, AS/NZS)	I _{cu}	(kA)	690V AC 525V AC 440V AC 400/415V AC 220/240V AC 250V DC	4 10 30 40 85 25
Service breaking capacity (IEC, JIS, AS/NZS)	I _{cs}	(kA)	690V AC 525V AC 440V AC 400/415V AC 220/240V AC 250V DC	4 7.5 15 20 43 13
Rated breaking capacity (NEMA)		(kA)	480V AC 240VAC	25 85
Protection				
Fixed thermal, fixed magnetic				■
Adjustable thermal, adjustable magnetic				-
Utilisation category				A
Installation				
Front connection (FC)				■
Extension bar (FB)				●
Cable clamp (FW)				●
Rear connection (RC)				●
Plug-in (PM)				-
DIN rail mounting (DA)				-
Dimensions	height	(mm)		165
	width	(mm)	3 pole	105
			4 pole	140
	depth	(mm)		68
Weight	weight	(kg)	3 pole	1.5
			4 pole	1.9
Operation				
Direct Opening Action				■
Toggle operation				■
Door mounted (HS) / Breaker mounted handle (HB)				●
Motor operation				●
Endurance	Electrical Mechanical	cycles cycles	415V AC	6,000 18,000

■ Standard ● Optional - Not Available

DATA SHEET: TEMBREAK 2 S250-SF MCCB

Outline Dimensions S250-SF

ASL: Arrangement Standard Line H: Handle Frame Centre Line C: Handle Centre Line

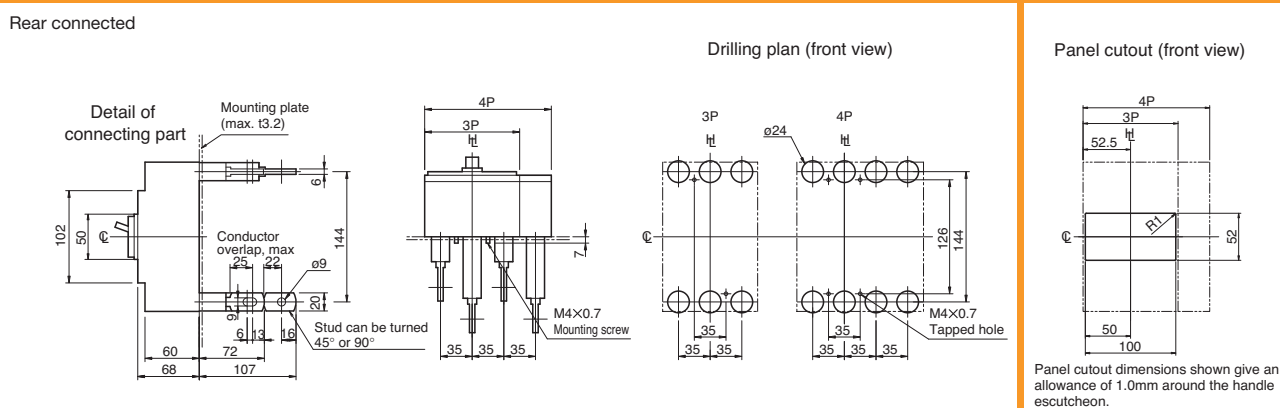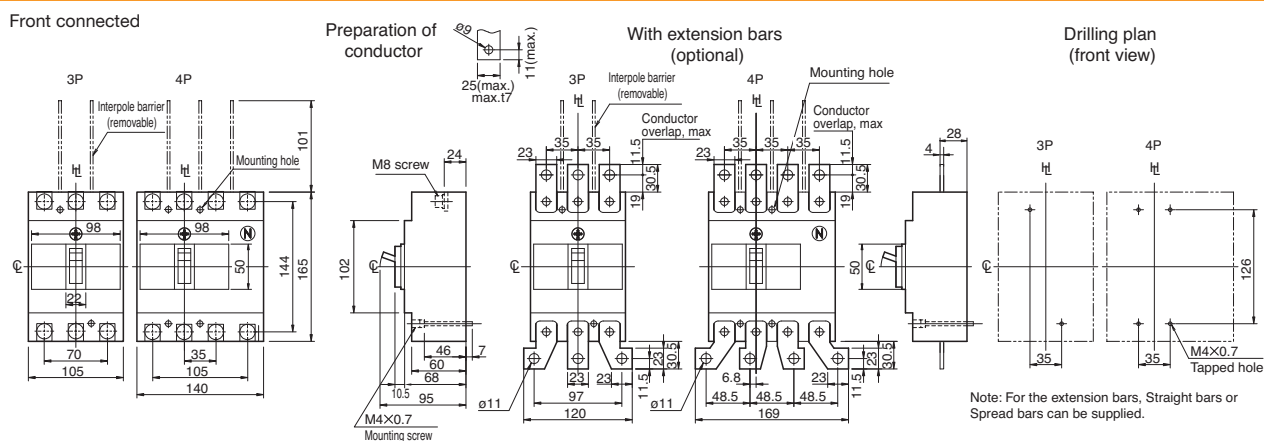

DATA SHEET: TEMBREAK 2 S250-SF MCCB

Time/Current Characteristic Curves S250-SF

