

DATA SHEET: TEMBREAK 2 E250-SCJ MCCB

Código Larce 4P: 0403001280 0403001281

MCCB Electrical Characteristics to IEC 60947-2, EN 60947-2, JIS C 8201-2-1 ANN.1, NEMA AB-1

Frame Reference	Quantity	Unit	Condition	TB2 Lite 250
Max In (A) of Frame				250
Model				E250
Number of Poles				3, 4
Type				SCJ
Nominal current ratings				
	I_n	(A)	50°C	100,125, 160,200 250
Electrical characteristics				
Rated operational voltage	U_e	(V)	AC 50/60 Hz DC	525 250
Rated insulation voltage	U_i	(V)		800
Rated impulse voltage	U_{imp}	(kV)		8
Ultimate breaking capacity (IEC, JIS, AS/NZS)	I_{cu}	(kA)	690V AC 525V AC 440V AC 400/415V AC 220/240V AC 250V DC	- 6 10 16 25 13
Service breaking capacity (IEC, JIS, AS/NZS)	I_{cs}	(kA)	690V AC 525V AC 440V AC 400/415V AC 220/240V AC 250V DC	- 3 5 8 13 7
Rated breaking capacity (NEMA)		(kA)	480V AC 240VAC	6 25
Protection				
Fixed thermal, fixed magnetic				-
Adjustable thermal, adjustable magnetic				■
Utilisation category				A
Installation				
Front connection (FC)				■
Extension bar (FB)				•
Cable clamp (FW)				•
Rear connection (RC)				•
Plug-in (PM)				-
DIN rail mounting (DA)				-
Dimensions	height width	(mm) (mm)	3 pole 4 pole	165 105 140
Weight	depth weight	(mm) (kg)	3 pole 4 pole	68 1.5 1.9
Operation				
Direct Opening Action				■
Toggle operation				■
Door mounted (HS) / Breaker mounted handle (HB)				•
Motor operation				•
Endurance	Electrical Mechanical	cycles cycles	415V AC	6,000 18,000


■ Standard • Optional - Not Available

DATA SHEET: TEMBREAK 2 E250-SCJ MCCB


Outline Dimensions E250-SCJ

ASL: Arrangement Standard Line H_L: Handle Frame Centre Line

Front connected

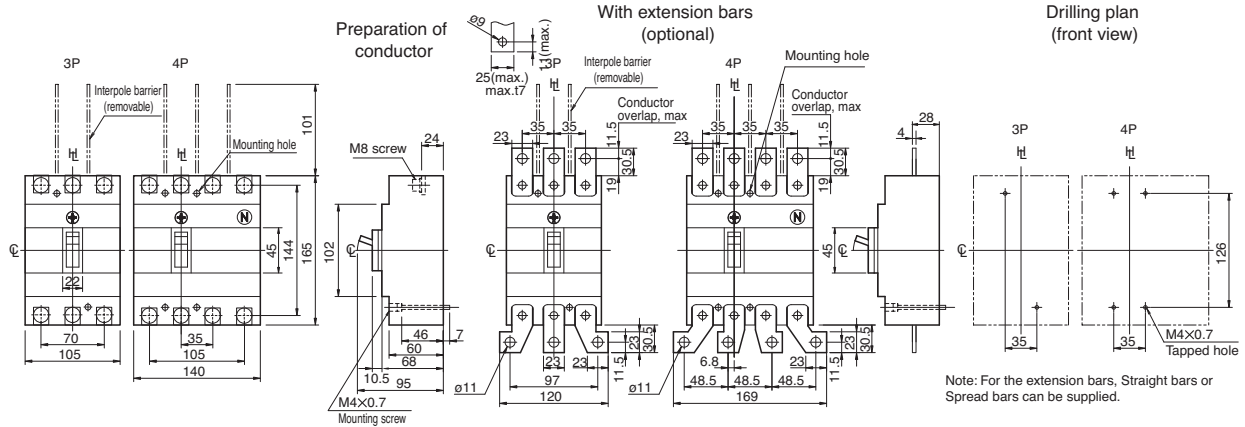


Rear connected

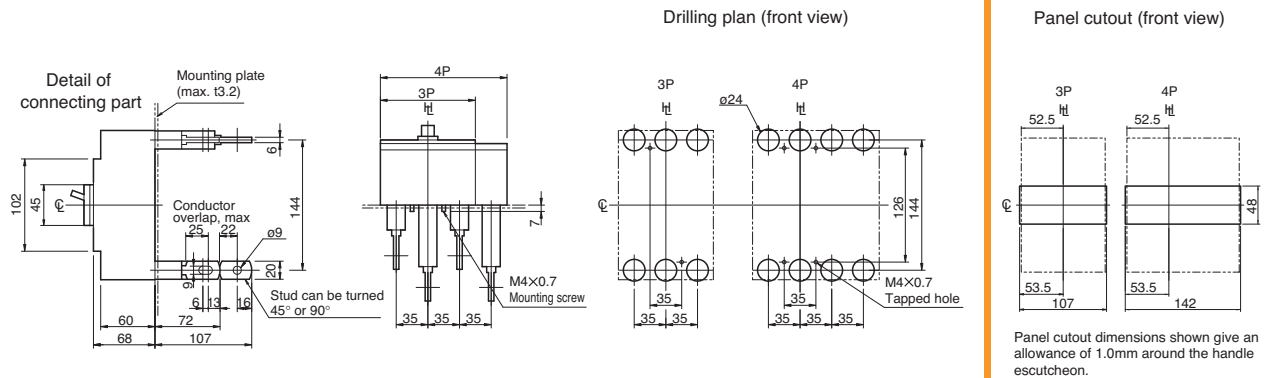

DATA SHEET: TEMBREAK 2 E250-SCJ MCCB


Time/Current Characteristic Curves

E250-SCJ (100 ~ 200A)

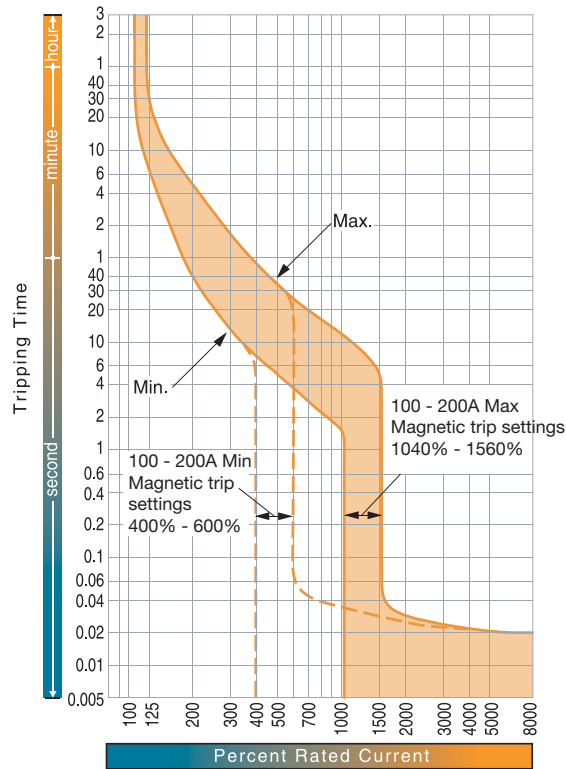

Time/Current Characteristic Curves

E250-SCJ (250A)

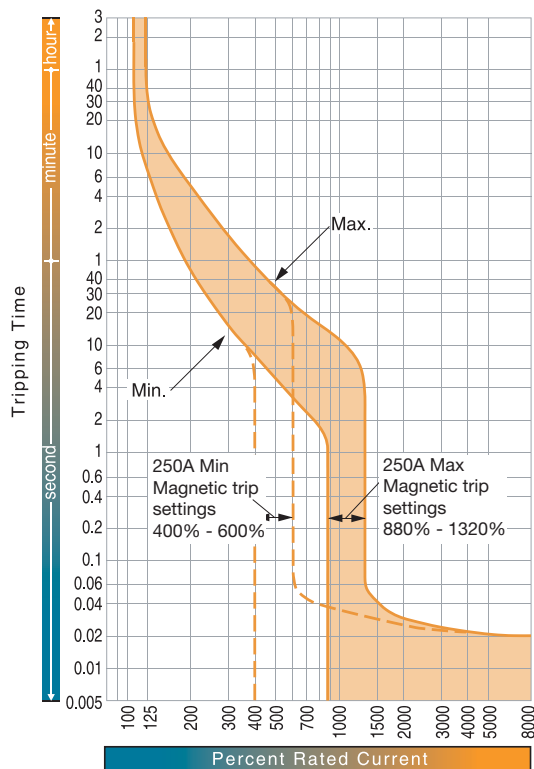

LARCE ELECTRIC

+56 226513330 www.larce.cl contacto@larce.cl

Oficina Comercial: Hannover 5461, Nuñoa, Santiago

Planta Industrial Santiago: Lucrecia Borgia 2736, Pedro Aguirre Cerda

Planta Industrial Casablanca: Ruta 68 Km.70, V Reg. Zona Ind. El Refugio