

TECS Miniature Circuit Breakers Accessories (10kA) For 2A-63A

Código Lorce: 0405005001 0405005002 0405005003
0405005004 0405005005




Auxiliary Switch EPAXM

Electrically indicates On/Off status of the breaker

Rated current	6A @AC230V/DC24V 3A @AC400V
Dielectric Strength	2,000 V/min
Wiring Capacity	1 - 4 mm ²
Mechanical Endurance	> 4,000 cycles

Mounting on the Left Side of breaker

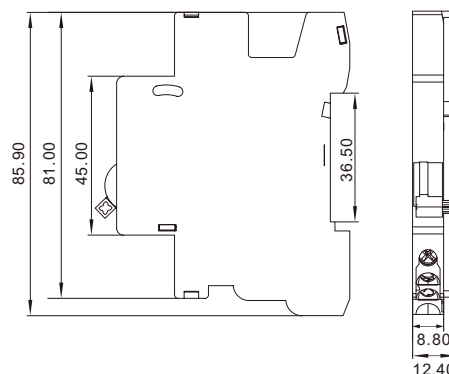


Alarm Switch EPALM

Electrically indicates when the breaker is in 'Tripped' state

Rated current	6A @AC230V/DC24V 3A @AC400V
Dielectric Strength	2,000 V/min
Wiring Capacity	1 - 4 mm ²
Mechanical Endurance	> 4,000 cycles

Mounting on the Left Side of breaker

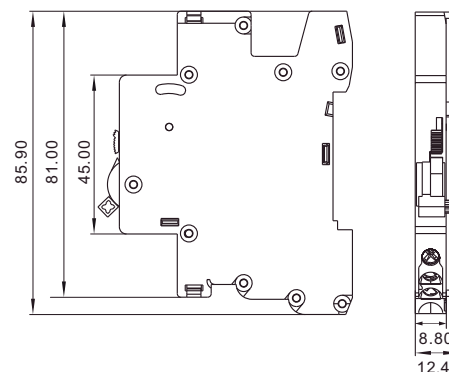


Shunt Trip EP10SHTM

Remote tripping of the breaker

Rated Voltage Ue	AC 110V / 230V / 400V
Operating Voltage Range	70~110% x Ue
Dielectric Strength	2,000 V/min
Wiring Capacity	1 - 4 mm ²
Mechanical Endurance	> 4,000 cycles

Mounting on the Left Side of breaker


* Non continuously rated coils

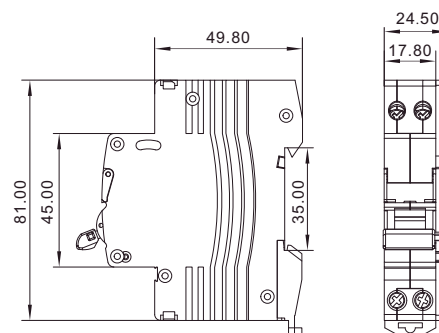

Locking Device



AS3
4A-63A
6kA/10kA MCB



AS5
4A-63A
6kA/10kA MCB

