



MODULO M-BUS COMM. MOD. FOR C70



Código Larce: 0709001376



DATI TECNICI - Technical data

connessione	connection	porta ottica IR - optical port (IR)
velocità (bps)	speed (bps)	38400
temperatura di funzionamento	operating temperature	-15 ÷ +60°C
temperatura di magazzino	storage temperature	-25 ÷ +75°C
umidità relativa (senza condensa)	humidity (without condensation)	max. 80%
grado di protezione	protection degree	IP20
conforme a	according to	EN61000-6-2, EN61000-4-2÷6 EN61000-4-11, EN55011, EN60950
Modbus		
protocollo	protocol	RTU = 8N1 - ASCII = 7E2
porta	port	RS485
velocità (bps)	speed (bps)	300...115200
indirizzamento	addressing range	01...F7 Hex
alimentazione	power supply	230Vac ±20% (5VA)
fusibile (da montare esternamente)	fuse (to be mounted externally)	type T, 100mA
ETHERNET		
protocolli	protocols	MODBUS/TCP, HTTP, FTP, TCP/IP
porta	port	MODBUS/TCP: 502
interfaccia di rete	network interface	10/100 Base-T
velocità (bps)	speed (bps)	10/100Mbps
alimentazione	power supply	230Vac ±20% (5VA)
fusibile (da montare esternamente)	fuse (to be mounted externally)	type T, 100mA
M-Bus		
protocollo	protocol	M-BUS
porta	port	2 morsetti / 2 screw terminals
velocità (bps)	speed (bps)	300...38400
indirizzamento	addressing range	01...F7 Hex
alimentazione	power supply	da linea bus / from bus connection (max24Vdc)

CODICI DI ORDINAZIONE - Ordering codes

ACCESSORI PER CONTATORI CON PORTA OTTICA - COMMUNICATION MODULES FOR ENERGY METERS WITH OPTICAL PORT

MCI _____


Comunicazione - Communication:	Modbus
	Ethernet (Modbus TCP)
	M-Bus (Meter Bus)

MCIMIDMDB


MCIMIDETH

MCIMIDMBU

DIMENSIONI - Dimensions

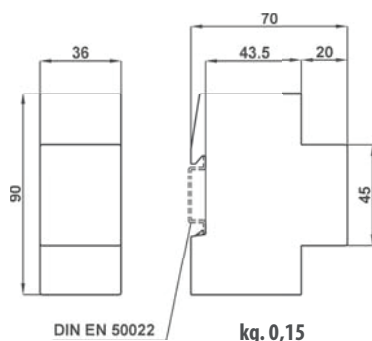

MCIMIDETH



MCIMIDMDB - MCIMIDMBU

LARCE ELECTRIC

☎ +56 226513330 www.larce.cl ✉ contacto@larce.cl

Oficina Comercial: Hannover 5461, Ñuñoa, Santiago

Planta Industrial Santiago: Lucrecia Borgia 2736, Pedro Aguirre Cerda

Planta Industrial Casablanca: Ruta 68 Km.70, V Reg. Zona Ind. El Refugio